

Globetrotter XXL Coach built

The big luxury! With its robust Iveco Daily chassis with rear-wheel drive, the Globetrotter XXL A is the workhorse in the Dethleffs model range. Ideal for towing trailers weighing up to 3.5 tonnes. Perfectly equipped, with plenty of space and absolutely winterproof thanks to frost-proof installation in the double floor!

Technical info

Overall length, approx.	884 cm
Overall width, approx.	235 cm
Overall height, approx.	345 cm
Headroom in living area, approx.	211 cm

Maximum values partly not possible for all models or only in connection with certain options.

Upholstery




+ Upholstery Samir



+ Upholstery Melia

○



+ Real leather upholstery Colin ○



+ Real leather individual ○

Wood décor




+ Wood décor Amberes Oak

○ optionally available

Plus factors

- + Powerful 3.0 l JTD engine with 210 hp (154 kW), automatic transmission, rear-wheel drive, dual tires, air suspension drive axle, full LED low and high beams
- + Absolute winter resistance due to heated raised floor with frost-protected installation.
- + Hot water heating as standard. Comfortable warmth even at the frostiest temperatures. Ideal for allergy sufferers, as no dust whirling up.
- + Professional self-sufficiency due to 150 Ah battery and 230 l fresh water tank
- + Lifetime Plus superstructure technology with absolutely rot-proof and durable wall construction
- + Gourmet kitchen with mineral countertop, 3-burner high-efficiency stove, generous drawers with soft-close retraction and central locking, apothecary pull-out, and more.
- + Spacious bathroom with sliding door to the bedroom

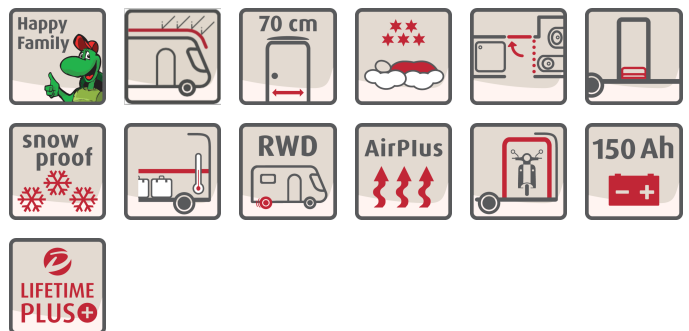

Globetrotter XXL Coach built

Technical info



Globetrotter XXL Coach built		A 9000-2 EB
Standard chassis		IVECO Daily Ladder Frame
Emission standards		Euro VI-E
Overall length, approx.	cm	884
Overall width, approx.	cm	235
Overall height, approx.	cm	345 ¹⁾
Headroom in living area, approx.	cm	211
Towable load braked/unbraked	kg	3500 / 750
Wheelbase, approx.	mm	4750
Bed dimension alcove, L x W, approx.	cm	215 x 150
Bed dimension: Central / middle bed, L X W, approx.	cm	195 x 130 / 210 x 130 ○
Bed dimension: Rear bed, L x W, approx.	cm	210 x 200 - 160 / 200 x 80 / 195 x 80
Sleeping berths standard / max.		6
Standard engine		3,0 l JTD
kW (bhp)		154 (210)
Mass in running order (+/-5%)*	kg	5080 (4826 to 5334)*
Manufacturer-specified mass for optional equipment*	kg	1267
Technically permissible maximum laden mass*	kg	6700
Permitted number of seats (including driver)*		4 - 6 ○
Refrigerator volume (thereof freezer), approx.	l	136 (23) / 177 (35) ○
Waste water tank, approx.	l	222
Fresh water tank capacity, total/ Fresh water tank capacity at driving filling	l	230 / 20
Measurement storage opening left (W x H)	cm	105 x 120
Measurement storage opening right (W x H)	cm	105 x 120
Clear dimensions of rear garage door/flap (W x H)	cm	105 x 75 ○

○ Optional equipment — Not possible ● Standard equipment ◆ Mandatory △ Not known at the time of publication



* INFO

The specified mass in running order is a default value defined in the type-approval procedure. Due to manufacturing tolerances, the actual weighed mass in running order may deviate from the value stated above. Deviations of up to ± 5 % of the mass in running order are legally permissible and possible. The permissible range in kilograms is given in brackets after the mass in running order. The manufacturer-specified mass for optional equipment is a calculated value for each type and layout that Dethleffs uses to determine the maximum weight available for factory-fitted optional equipment. The limitation of optional equipment is intended to ensure that the minimum pay-mass, i.e. the legally prescribed free mass for baggage and retrofitted accessories, is actually available for the vehicle load capacity of the vehicles delivered by Dethleffs. The real weight of your vehicle ex works can only be determined when it is

weighed at the end of the line. If, in exceptional cases, the weighing shows that the actual load capacity falls below the minimum pay-mass despite limiting the optional equipment due to a permissible weight deviation, we will check together with your trade partner and you whether we should, for example, increase the load capacity of the vehicle, reduce the number of seats or remove optional equipment before delivering the vehicle. The technically permissible maximum laden mass of the vehicle and the technically permissible maximum mass on the axle must not be exceeded. Detailed information & explanations on the subject of weight and the configuration of the vehicle can be found in the section Legal information. For a more detailed description of all mandatory technical dependencies, please refer to the explanations on the footnotes.

Standard equipment

Iveco chassis	
16" steel rim with 225/75 R16 M+S	●
IVECO Daily ladder frame (6,700 kg) 3.0 I JTD (154 kW / 210 hp), torque converter automatic transmission	●
Iveco chassis features	
Adaptive Cruise Control incl. Active Lane Keeping Assist and Active Brake Assist with City Emergency Braking function	●
Air suspension for driving axle (original Iveco)	●
Alternator 220 Ah	●
Breakdown kit	●
Cab entrance step	●
Central dash tray (A4 format) with 2 x USB and aux-in	●
Crosswind Assist	●
Cruise control	●
Differential lock for driving axle	●
Driver and passenger airbags	●
Drivers cab A/C (automatic)	●
ESP, ASR, ABS with EBD, Hill Holder and Hydraulic Brake Assist	●
Electric handbrake	●
Exterior mirrors that can be heated and adjusted electrically	●
Fog lights with static cornering lights	●
Fuel tank 90l plus 20l AdBlue	●
High Beam Assist	●
Hill Descent Control	●
LED headlights incl. integrated daytime running lights	●
Luxury front seats with heated seats, two padded armrests, 3-way adjustable, hydraulic, luxury headrests with Dethleffs logo	●
Multifunctional leather steering wheel	●
Rain sensor incl. driving light assistant	●
Rear wheel drive with twin tyres	●
Spare wheel located under the vehicle rear	●
Tyre pressure sensors	●
Exterior features	
70 cm wide habitation door with window and blind	●
Bedroom window right and left	●
Central locking for the driver's cab, habitation and garage door	●
Double floor storage, some of which can be loaded across almost the entire vehicle width	●
Double-glazed flush-fitting windows with blackout & mosquito net (Privacy Black)	●
Electric closing aid for habitation door	●
Floor thickness: 43 mm, side wall thickness: 44mm and roof thickness: 45 mm	●
Flyscreen habitation door	●
GRP roof	●
Habitation access with comfortable coupe entrance	●
Habitation access with comfortable, wide, electric step	●
High characteristic Dethleffs Exclusive rear light carrier with ShapeLine LED taillights and 3rd brake light integrated in rear spoiler	●
Lifetime Plus construction technology: rot-free superstructure with no wood inserts, XPS insulation with GRP cladding on the underslung and roof	●
Opening window in overcab left	●
Opening window in overcab right	●
Rear garage: two garage door with one-hand operation, rear lowering (250 kg), heated, lashing rails, LED lights across the entire width, 230 V socket, GRP anti-slip flooring and fleece cove	●
Side panels and rear panel in smooth aluminium sheets	●
Skylight 40 x 40 cm above the seating lounge	●
Exterior design	
Exterior body painted in white	●
Interior design	

Standard equipment

Upholstery Samir	●
Wood décor Amberes Oak	●
Textile equipment	
Rear beds with ergonomic wooden slatted frames and 150 mm thick 7-zone premium mattresses made of climate-regulating material	●
Furniture layouts	
AirPlus overhead locker rear ventilation to avoid condensation	●
Bed convert for seating lounge transverse	●
Floor-to-ceiling wooden sliding door to the bedroom	●
Fold-away overcab bed	●
High-level single beds incl. comfortable access via steps	●
Large face-to-face seating area with mountable and extendible table incl. two integrated 3-point seatbelts	●
No steps in living room	●
Option to convert single beds to double bed	●
Overhead lockers in the rear area	●
Storage bench enlargement, fold-away with storage space	●
Wardrobe floor-to-ceiling with convenient linen drawers in upper area	●
Kitchen	
Extractor fan (extracted air) with draught stopper	●
Floor-to-ceiling fridge with separate freezer compartment and automatic energy selection (AES) (136 l)	●
Gourmet kitchen: three-ring hob, large drawers with soft-close function, cutting board, apothecary drawers, waste bin and central locking	●
Kitchen overhead locker with illuminated roof lining	●
Bathroom	
Equipped with cabinets, storage compartments, hooks, large mirrors and a height-adjustable shower head	●
Large bathroom with separate shower and toilet with locking door to the lounge	●
Shower grate	●
Shower panel and bathroom accessories in black	●
Window in bathroom	●
Multimedia	
DAB+ radio antenna mounted on the roof	●
Flat-screen TV bracket	●
Preparation for radio system incl. sound package in the driver's cabin	●
Heating	
Heat exchanger for hot-water heating	●
Hot-water heating with boiler, automatic drain valve and shut-off valve for the sleeping area and digital control panel	●
Electrical installation	
Automatic switch-on/disconnect for starter battery, leisure battery and refrigerator	●
Awning light 12 V	●
Dethleffs connect - System Control Unit	●
Electric block with integrated overvoltage protection and separate ground fault circuit breaker	●
LED lighting throughout the vehicle	●
Leisure battery AGM, 95 Ah	●
Number of sockets 1x 12V, 7x 230V, 3x USB	●
Premium on-board control panel with touchscreen	●
Two-tone sockets and switches	●
Water supply	
Fresh water and waste water tanks installed in double floor (insulated area)	●
Pressurized water pump system	●
Switch for water pump	●
Gas supply	
Storage space for 2 gas bottles with a filling weight of 11 kg each, with simplified access	●

PACKAGES GLOBETROTTER XXL COACH BUILT

Package	Dual Battery System Package 1 (7488)	Dual Battery System Package 2 (7489)
Victron PowerAssist and PowerControl	x	x
Electric block EBL 102	x	x
Victron control panel above the habitation door	x	x
Victron Energy MultiPlus charging/inverter combination 1600W/70A	x	
168 Ah lithium battery	x	
Victron Energy MultiPlus charging/inverter combination 3000W/120A		x
336 Ah lithium battery		x
Additional weight (kg)*	63	113

XXL Travel Package (14841)	
Carpet, loose	
Light Moments: Indirect ambient lighting above the overhead lockers	
Roof A/C	
Panoramic skylight 75x105 cm in the lounge	
Rear corner steadies supports (2 pcs.) for rear mounting	
Integrated single-lens rear view camera	
Additional weight (kg)*	89.7

Light Moments (14837)	
Light Moments: Indirect dimmable wall surface ambient lighting, indirect lighting in the bathroom with illuminated shower console, canopy in the alcove and seating group area with indirect lighting and plinth lighting in the kitchen	
Additional weight (kg)*	△

Pre-wiring kit (11350)	
Pre-wiring for solar	
Pre-wiring for roof A/C	
Pre-wiring for satellite system	
Pre-wiring for first rear view camera	
Pre-wiring for second rear view camera	
Additional weight (kg)*	7.6

△ Not known at the time of publication



The factory installation of optional equipment increases the actual mass of the vehicle and reduces the pay-mass. The additional weight indicated for packages and optional equipment shows the additional weight compared to the standard equipment of the respective model or layout. The total weight of the selected optional equipment must not exceed the manufacturer-specified mass for

optional equipment shown in the model overviews. This is a calculated value for each type and layout that Dethleffs uses to determine the maximum weight available for factory-fitted optional equipment. Detailed information and explanations on the subject of weight can be found in the Legal information section.

Optional equipment**

	Included in package	Additional weight (kg)*	Code	A 9000+2 EB
Weight upgrade				
Weight upgrade 7,200 kg (for trailer operation, check permissible gross towing weight of 10.2 t) ²⁶⁾	—	0	1636	○
Iveco chassis features				
Rear corner steadies supports (2 pcs.) for rear mounting	—	13.5	390	○
Safety Package II: 2 x 3-point seatbelt for seat facing away from driving direction ⁹⁾	—	17.5	561	○
Tow bar (Iveco) ²⁶⁾	—	30	273	○
Exterior features				
Double floor in rear garage	—	18	1890	○
Omnistor cassette awning 6.0 m (electric)	—	70	519	○
Omnistor cassette awning 6.0 m (manual)	—	64	560	○
Panoramic skylight 75x105 cm incl. illuminated roof lining in the bedroom	—	17.5	442	○
Roof vent with fan	—	1.5	7507	○
Storage access in the rear	—	10	1732	○
Exterior design				
Side panels in metallic titanium silver	—	0	511	○
Interior design				
Real leather individual ¹⁷⁾	—	0	9785	○
Real leather upholstery Colin	—	0	11952	○
Upholstery Melia	—	0	11950	○
Textile equipment				
Carpet, loose	—	8.7	851	○
Furniture layouts				
ISOFIX child seat bracket for third and fourth seat facing direction of travel	—	4	8125	○
U-shaped seating (free-standing, rigid table base with surrounding seating and backrest cushions)	—	7	1870	○
Kitchen				
Fridge (177 l), can be opened on both sides, with integrated oven	—	18.5	290	○
Winter cover for refrigerator vents	—	0.3	282	○
Bathroom				
Ceramic toilet ¹⁸⁾	—	9.1	7243	○
Macerator toilet with waste-holding tank	—	52	1625	○
Toilet ventilation via the roof ¹⁸⁾	—	0.8	1681	○
Multimedia				
32" TV (incl. bracket) incl. soundboard	—	9	9127	○
Additional 22' flat screen incl. flat screen bracket	—	5.5	7490+1809	○
Automatic satellite system 85 Twin	—	16	1637	○
Dethleffs Naviceiver incl. DAB+, truck navigation, wireless Apple CarPlay and Android Auto	—	3.65	9582	○
Second rear view camera in rear moulding	—	1	11541	○
Sound Package Plus	—	15.5	8082	○
Top View 360° HD camera ²⁰⁾	—	4.5	7173	○
Heating				
Electrically heated overcab bed	—	16.5	1740	○



The factory installation of optional equipment increases the actual mass of the vehicle and reduces the pay-mass. The additional weight indicated for packages and optional equipment shows the additional weight compared to the standard equipment of the respective model or layout. The total weight of the selected optional equipment must not exceed the manufacturer-specified mass for optional equipment shown in the model overviews. This is a calculated value for each type and layout that Dethleffs uses to determine the maximum weight available for factory-fitted optional equipment. Detailed information and

explanations on the subject of weight can be found in the Legal information section. An increase of load capacity increases the manufacturer-specified mass for optional equipment. The increase results from the higher pay-mass due to the alternative chassis. The increased tare weight of the alternative chassis and, in particular, the weight for any mandatory heavier engine variants (e.g. 180 hp) must be deducted from this. For a more detailed description of all mandatory technical dependencies, please refer to the explanations on the footnotes.

Optional equipment**

	Included in package	Additional weight (kg)*	Code	A 9000-Z EB
Air Conditioning				
Roof A/C	—	38.5	609	○
Electrical installation				
Solar power system 100 watt	—	12.6	922	○
Water supply				
Outdoor shower installed in rear garage (hot/cold water)	—	2.4	1574	○
Gas supply				
Automatic gas cylinder switchover incl. crash sensor, EisEx and gas filter	—	2.5	1577	○
Outdoor gas socket gas pressure 30 mbar	—	1.3	878	○
Safety				
2 kg fire extinguisher	—	4	1878	○
Alarm system (for door with central locking)	—	0.5	322	○
Smoke detector	—	0.2	1891	○
Packages				
Dual Battery System Package 1	—	63	7488	○
Dual Battery System Package 2	—	113	7489	○
Light Moments	—	△	14837	○
Pre-wiring kit	—	7.6	11350	○
XXL Travel Package	—	89.7	14841	○
Miscellaneous				
Registration documents (CoC papers)	—	0	15152	◆

○ Optional equipment — Not possible ● Standard equipment ◆ Mandatory △ Not known at the time of publication



* INFO

The factory installation of optional equipment increases the actual mass of the vehicle and reduces the pay-mass. The additional weight indicated for packages and optional equipment shows the additional weight compared to the standard equipment of the respective model or layout. The total weight of the selected optional equipment must not exceed the manufacturer-specified mass for optional equipment shown in the model overviews. This is a calculated value for each type and layout that Dethleffs uses to determine the maximum weight available for factory-fitted optional equipment. Detailed information and

explanations on the subject of weight can be found in the Legal information section. An increase of load capacity increases the manufacturer-specified mass for optional equipment. The increase results from the higher pay-mass due to the alternative chassis. The increased tare weight of the alternative chassis and, in particular, the weight for any mandatory heavier engine variants (e.g. 180 hp) must be deducted from this. For a more detailed description of all mandatory technical dependencies, please refer to the explanations on the footnotes.

TECHNICAL INFORMATION / FOOTNOTES

If you order your vehicle with additional equipment, you should check whether it makes sense or is necessary to increase the vehicle's weight! The optional equipment partially replaces the standard equipment. Individual components of packages can also be ordered separately. Please note that this does not entitle you to the price advantage and may also extend the delivery time. Please contact your retail partner for more information.

FOOTNOTES

- 1) Please note that the total height may increase due to additional roof structures and optional equipment..
- 2) The maximum trailer load increases to 2500 kg in combination with the "Ford automatic transmission" option.
- 3) Only possible in combination with the option "Active Package".
- 4) Only possible in combination with option 11258 "Automatic HD SAT system 65 Twin"
- 5) Only possible in combination with the "Flat screen 22' or 32' TV' option.
- 6) Only possible in combination with the option "Preparation for radio system incl. sound package in the driver's cab" (Code 659).
- 7) The standard 25 A charge booster is replaced by a 45 A charge booster.
- 8) Not possible in combination with the option "Active Package"
- 9) An optional seat must be considered as a regular seat when calculating the minimum payload and the mass of the passengers. In order to obtain an optional seat, it must be ensured that the minimum payload is still maintained and that all other legal mass values are complied with. Please contact our trade partners for detailed information.
- 10) Only possible in combination with the option "Seat group with belt bench incl. two 3-point belts" (Code 1951).
- 11) Only possible in combination with the option "Comfort Package T".
- 12) The "70x50 cm panoramic skylight in the living area" is replaced by a "40x40 cm panoramic skylight" in combination with the "electric drop-down bed above the seating group" option (code 13738).
- 13) Only possible in combination with option 761 "warm water heating"
- 14) Not possible in combination with option 761 "Hot water heating"
- 15) Only possible in combination with option 7505 "captain's chair with air suspension from SKA"
- 16) Only possible in combination with option "real leather upholstery"
- 17) Your local trade partner will be happy to help you design and define the "Individual genuine leather".
- 18) Not possible in combination with the option "Macerator ceramic toilet with waste-holding tank" (Code 1625).
- 19) Only possible in combination with the option "Dethleffs Naviceiver " (Code 9582).
- 20) The "Top View 360° HD camera" option replaces the standard rear view cameras (1642 and 11541).
- 21) The "Cassette awning Omnistor 6.0 m (electric)" option replaces the standard "Cassette awning Omnistor 6.0 m (manual)".
- 22) Only possible in combination with the option "Bed construction seating group transverse" (code 1944).
- 23) Please note that with the option "Extra seat incl. side couch instead of sideboard" (code 435) the flat screen holder or the optional 32" flat screen (code 9807) is mounted on the entrance module.
- 24) Only possible in combination with the option "Additional seat incl. side couch" (code 435).
- 25) Option 7636 "rear view camera" and 11541 "second rear view camera" only possible in combination
- 26) In combination with the option "Weight upgrade 7,200 kg", the maximum trailer load is reduced to 3,300 kg (taking into account the maximum gross towing weight).

LEGAL NOTES ON WEIGHT-RELATED INFORMATION

The weight specifications and tests for **motorhomes** are uniformly regulated throughout the EU in EU Implementing Regulation No. 2021/535 (until June 2022: EU Implementing Regulation No. 1230/2012). We have summarised and explained the key terms and legal requirements from this **regulation** for you below. Our **dealers** and the Dethleffs configurator on our website offer you additional assistance in configuring your vehicle.

1. Technically permissible maximum laden mass

The **technically permissible maximum laden mass** of the vehicle (e.g. 3,500 kg) is a mass specification set by the manufacturer which the vehicle must not exceed. Information on the **technically permissible maximum laden mass** of the model you have chosen can be found in the technical data. If the vehicle exceeds the **technically permissible maximum laden mass** in everyday driving, this constitutes an administrative offence which may result in a fine.

2. Mass in running order

In simple terms, the **mass in running order** is the basic vehicle with **standard equipment** plus a legally fixed standard weight of 75 kg for the driver. This essentially includes the following items:

- the unladen weight of the vehicle together with the bodywork, including operating fluids such as greases, oils and coolants;
- the **standard equipment**, i.e. all equipment items that are included as standard in the factory-fitted scope of delivery;
- the fresh water tank filled to 100 % in driving mode (driving fill according to manufacturer's specifications;) and an aluminium gas cylinder filled to 100 %;
- the **fuel tank**, which is 90 % full, including fuel;
- the driver, whose weight – regardless of the actual weight – is generally specified as 75 kg in accordance with EU law.

Information on the **mass in running order** can be found for each model in our sales documents. It is important to note that the value for **mass in running order** given in the sales documents is a default value determined in the **type-approval procedure** and verified by the authorities. It is legally permissible and possible for the **mass in running order** of the vehicle delivered to you to deviate from the nominal value stated in the sales documents. The legally permissible **tolerance** is $\pm 5\%$. In this way, the EU legislator accounts for the fact that certain fluctuations in the **mass in running order** occur due to variations in the weight of supplied parts as well as due to processes and weather conditions.

These weight deviations can be illustrated by means of an example calculation:

- **Mass in running order** acc. to sales documents: 2,850 kg
- Legally permissible **tolerance** of $\pm 5\%$: 142.50 kg
- Legally permissible range of **mass in running order**: 2,707.50 kg to 2,992.50 kg

The specific range of permissible weight deviations can be found for each model in the technical data. Dethleffs makes great efforts to reduce weight variations to the minimum that is unavoidable for production reasons. **Deviations** at the upper and lower end of the range are therefore very rare; however, they cannot be completely ruled out technically, even

with all optimisations. The real weight of the vehicle and compliance with the permissible **tolerance** is therefore checked by Dethleffs by weighing each vehicle at the **end of the line**.

3. Mass of the passengers

The **mass of the passengers** is set a standard value of 75 kg for each seat provided by the manufacturer, regardless of the actual weight of the passengers. The **mass of the driver** is already included in the **mass in running order** (see no. 2 above) and is therefore not included again. In the case of a **motorhome** with four **permitted seats**, the **mass of the passengers** is therefore $3 * 75 \text{ kg} = 225 \text{ kg}$.

4. Optional equipment and actual mass of the vehicle

Optional equipment (also: additional equipment) includes, according to the legal definition, all optional equipment parts not included in the **standard equipment** which are fitted to the vehicle under the responsibility of the manufacturer – i.e. ex works – and can be ordered by the customer (e.g. awning, bicycle or motorbike carrier, satellite system, solar system, oven, etc.). Information on the individual or package weights of the **optional equipment** that can be ordered can be found in our sales documents. **Optional equipment** in this sense does not include other **accessories** that are retrofitted by the **dealer** or you personally after the vehicle has been delivered ex works.

The **mass of the vehicle in running order** (see no. 2 above) and the mass of the **optional equipment** fitted to a specific vehicle at the factory are together referred to as the **actual mass**. You will find the corresponding information for your vehicle after handover under item 13.2 of the Certificate of Conformity (CoC). Please note that this specification also represents a standardised value. Since the **mass in running order** – as an element of the **actual mass** – is subject to a legally permissible **tolerance** of $\pm 5\%$ (see no. 2), the **actual mass** may also deviate accordingly from the stated nominal value.

5. Pay-mass and minimum pay-mass

The installation of optional equipment is also subject to technical and legal limits: Only so much optional equipment can be ordered and fitted at the factory that sufficient free weight remains for baggage and other accessories ("pay-mass") without exceeding the technically permissible maximum laden mass. The pay-mass is calculated by subtracting the mass in running order (nominal value according to sales documents, see no. 2 above), mass of the optional equipment and the mass of the passengers (see no. 3 above) from the technically permissible maximum laden mass (see no. 1 above). The EU regulations stipulate a fixed minimum pay-mass for motorhomes, which must remain as a minimum for baggage or other non-factory-fitted accessories. This minimum pay-mass is calculated as follows:

Minimum pay-mass in kg $\geq 10 * (n + L)$

Where: "n" is the maximum number of passengers plus the driver and "L" is the overall length of the vehicle in metres.

For a motorhome with a length of 6 m and 4 approved seats, the minimum pay-mass is therefore e.g. $10 \text{ kg} * (4 + 6) = 100 \text{ kg}$.

To ensure that the **minimum pay-mass** is maintained, there is a maximum combination of **optional equipment** that can be ordered for each vehicle model. In the above example with a **minimum pay-mass** of 100 kg, the total mass of **optional equipment** for a vehicle with four **permitted seats** and a **mass in running order** of 2,850 kg should not exceed 325 kg:

3,500 kg **technically permissible maximum laden mass**
 - 2,850 kg **mass in running order**
 - 3*75 kg **mass of the passengers**
 - 100 kg **minimum pay-mass**
 = 325 kg **maximum permissible mass of optional equipment**

It is important to note that this calculation is based on the default value for **mass in running order** as defined in the **type-approval procedure**, without taking into account the permissible weight deviations for **mass in running order** (see no. 2 above). If the maximum permissible value for the **optional equipment** of (in the example) 325 kg is almost or completely exhausted, an upward weight deviation can therefore result in the **minimum pay-mass** of 100 kg being met mathematically using the default value for the **mass in running order**, although in fact there is no corresponding **load capacity**. Here, too, an example calculation for a vehicle with four seats, whose real weighed **mass in running order** is 2 % above the nominal value:

3.500 kg **technically permissible maximum laden mass**
 - 2.907 kg **real weighed mass in running order** (+ 2 % compared to the stated value of 2,850 kg)
 - 3*75 kg **mass of the passengers**
 - 325 kg **optional equipment** (maximum permissible value)
 = 43 kg **actual load capacity** (< **minimum pay-mass** of 100 kg)

In order to avoid such a situation, Dethleffs further reduces the maximum permissible weight of the total **optional equipment** that can be ordered on a model-specific basis. The limitation of **optional equipment** is intended to ensure that the **minimum pay-mass**, i.e. the legally prescribed free mass for **baggage** and retrofitted **accessories**, is actually available for the **vehicle load capacity** of the vehicles delivered by Dethleffs. Since the weight of a specific vehicle can only be determined when it is weighed at the **end of the line**, in very rare cases a situation may arise in which the **minimum pay-mass** at the **end of the line** is not guaranteed, despite this limitation of **optional equipment**. In order to guarantee the **minimum pay-mass** even in these cases, Dethleffs will check together with your **trade partner** and you before delivery of the vehicle whether, for example, the vehicle is loaded up, seats are reduced or **optional equipment** is removed.

6. Effects of tolerances of the mass in running order on the pay-mass

Regardless of the **minimum pay-mass**, you should note that unavoidable production-related fluctuations in the **mass in running order** – both upwards and downwards – have a mirror-image effect on the remaining **load capacity**: If you order our example vehicle (see no. 3. above), for example, with **optional equipment** with a total weight of 150 kg, the calculated **pay-mass** based on the default value for the **mass in running order** is 275 kg. The **load capacity** actually available may deviate from this value due to **tolerances** and may be higher or lower. If the **mass in running or-**

der of your vehicle is, for example, permissibly 2 % higher than stated in the sales documents, the **load capacity** is reduced from 275 kg to 218 kg:

3.500 kg **technically permissible maximum laden mass**
 2.907 kg **real weighed mass in running order** (+ 2 % compared to the stated value of 2,850 kg)
 3*75 kg **mass of the passengers**
 150 kg **optional equipment** ordered for the specific vehicle
 = 218 kg **sactical load capacity**

As a precaution to ensure that the calculated **pay-mass** is actually given, you should therefore take the possible and permissible **tolerances** for the **mass in running order** into account when configuring your vehicle. We also recommend that you weigh the laden **motorhome** on a non-automatic scale before each journey and, taking the individual weight of the **passengers** into account, determine whether the **technically permissible maximum laden mass** and the **technically permissible maximum mass on the axle** are observed.